


## CONTACT

## DIMENSIONS


## SPECIAL FEATURES

## REPLACES

SURFACE MOUNT

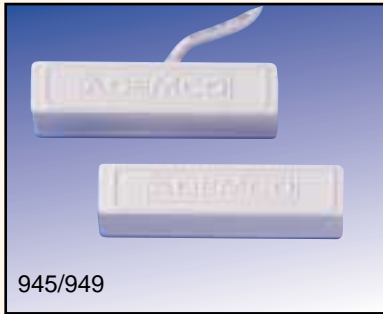

945/949




### 945/949 Surface Mount Magnetic Contact with Leads

- 15 foot zip cord leads standard
- Standard gap: 1-1/4"
- Choose self adhesive (945), or screw mount (949)
- Pkg. quantity=5/bag

- Sentrol 1035
- GRI 100-12,110-12
- Nascom N35
- Tane FM106
- Aleph PS1541



945T



### 945T Mini Surface Mount with Screw Terminals


- Screw mount or adhesive mount
- Screw terminals eliminate wire splicing and soldering
- Standard gap: 1-1/8"

- Sentrol 1038T
- GRI 100T,110T
- Tane-60
- Aleph DC-2531

AVAILABLE  
IN  
AMMO BOX



PR-20445




### PR-20445 Mini Surface Mount with Leads

- Miniature size for cleaner look
- Standard gap: 1-1/4"
- 18" long wire leads
- Screw mount or adhesive mount


- Sentrol 1085,1032
- GRI 110-12
- Nascom N35
- Tane FM106
- Aleph PS1541

AVAILABLE  
IN  
AMMO BOX

COMMERCIAL

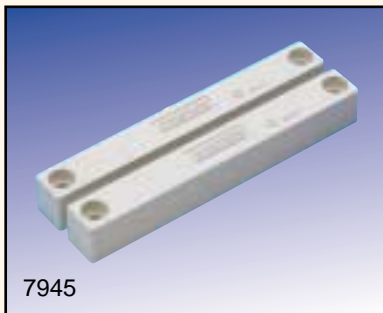


7945




### 7945 XTP Surface Mount Magnetic Contact with Leads

- XTP contacts withstand surges up to 2400 volts DC
- 6' CLII cable is standard
- Epoxy sealed
- Wide gap of 2.5"
- Available in SPDT (7945-2GY)
- Pkg. quantity=1/bag

- Sentrol 1045
- GRI 400,410
- Amseco AMS37

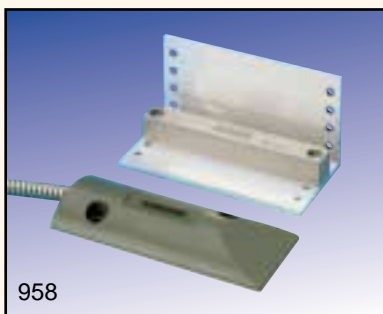

958



### 958 Overhead Door Magnetic Contact


- Adjustable magnet with L-bracket
- 24" armored cable is standard
- Standard gap: 2-3/8"
- Epoxy sealed for protection from moisture and impact
- Available in SPDT (958-2)
- Pkg. quantity=1/bag

- Amseco ODC59A
- Sentrol 2202AU,2202A
- GRI 4532/4532L


**ALL MODELS:**   
Specify color: White (WH), Brown (BR), Gray (GY)

COMMERCIAL  
RECESSED

CONTACT	DIMENSIONS	SPECIAL FEATURES	REPLACES
---------	------------	------------------	----------

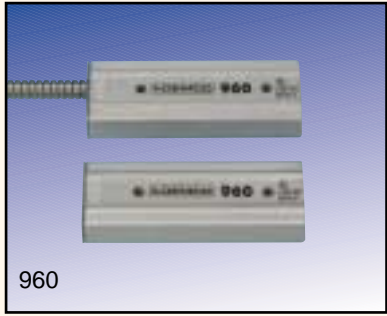


960




- 960 XTP Surface Mount Magnetic Contact**
- XTP contacts withstand surges up to 2400 volts DC
  - Epoxy Sealed
  - 3' armored cable is standard
  - Wide gap of 2.5"
  - Available in SPDT (960-2)
  - Pkg. quantity=1/bag

- Sentrol 2505A
- GRI 4400
- Nascom 505A

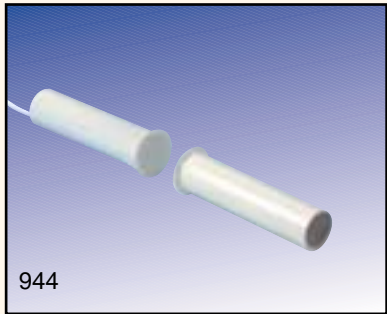


944

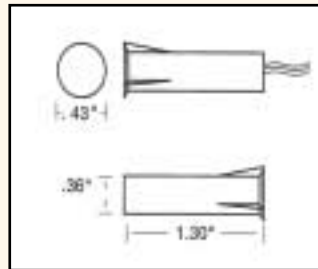


- 944 3/8" Diameter Recessed Contact**
- Standard gap: 3/4"
  - Convenient 5' zip cord leads are standard
  - Available in SPDT (944-2GY)
  - PR-20411 for PRO version with 18" leads

- Sentrol 1075
- GRI 2020-12
- Nascom N-75
- Tane TAP-10
- Aleph DC-1621

AVAILABLE  
IN  
AMMO BOX

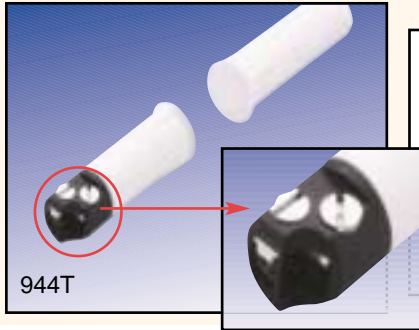


944T




- 944T 3/8" Diameter Recessed Contact with Screw Terminals**
- 3/8" diameter press fit design
  - Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screw driver
  - Standard gap: 3/4"

- Sentrol 1125T
- GRI 2020T
- Aleph DC- 3621
- Tane-3/8T

AVAILABLE  
IN  
AMMO BOX

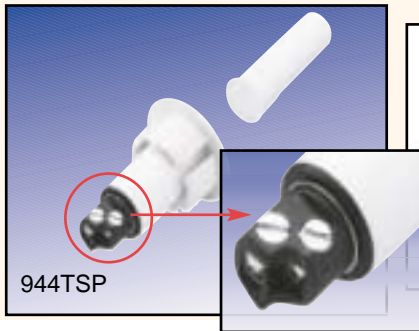


944TSP




- 944TSP 3/4" Recessed Contact with 3/8" Magnet**
- 3/4" diameter switch for easier wiring...3/8" diameter magnet
  - Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screw driver
  - Standard gap: 3/4"
  - Available with 5' leads (944SP)

- GRI 120T-12

AVAILABLE  
IN  
AMMO BOX

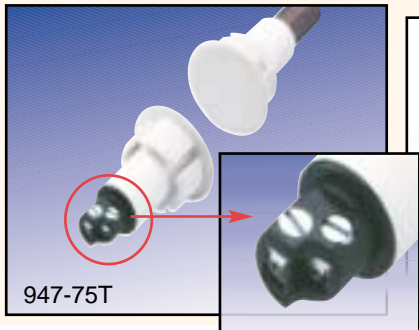

947-75T



- 947-75T 3/4" Diameter Steel Door Contact with Terminals**
- Standard gap: 1/2" in steel
  - Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screw driver
  - Order 947-75 for 5' leads





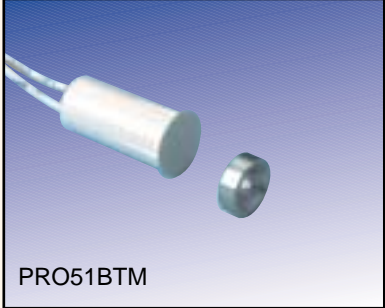

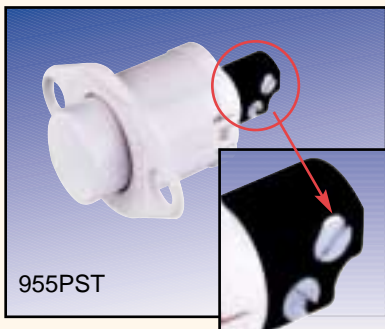

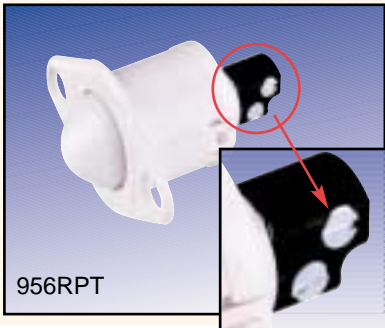

- Sentrol 1078CT
- GRI 8080-T
- Tane 3/4 TC

AVAILABLE  
IN  
AMMO BOX

**ALL MODELS:**

Specify color: White (WH), Brown (BR), Gray (GY)

RECESSED

CONTACT	DIMENSIONS	SPECIAL FEATURES	REPLACES
 <p>951</p>		<p><b>951</b>  <b>3/8" Diameter Mini Recessed Contact</b></p> <ul style="list-style-type: none"> <li>• With magnet only 1/2" long, the 951 is ideal for casement windows, sliding windows and other thin frame applications</li> <li>• Standard gap: 7/16"</li> <li>• 5' zip cord leads are standard</li> </ul> <p>• <b>PR-20451 for PRO version with 18" leads</b></p>	<ul style="list-style-type: none"> <li>• Sentrol 1125</li> <li>• GRI 20RS-12</li> <li>• Nascom N-175N</li> <li>• Tane STB-10</li> <li>• Aleph DC-1651</li> </ul> <p><b>AVAILABLE IN AMMO BOX</b></p>
 <p>PRO51SP</p>		<p><b>PRO51SP</b>  <b>"Stubby" Press Fit Recessed Magnetic Contact with Wide Gap</b></p> <ul style="list-style-type: none"> <li>• Stubby 3/8" diameter switch with extra length magnet</li> <li>• Standard gap: up to 3/4"</li> <li>• 18" Leads</li> </ul>	<ul style="list-style-type: none"> <li>• GRI 5065</li> <li>• Aleph PS-1650</li> </ul> <p><b>AVAILABLE IN AMMO BOX</b></p>
 <p>PRO51BTM</p>		<p><b>PRO51BTM</b>  <b>3/8" "Stubby" Recessed Contact with Rare Earth Button Magnet</b></p> <ul style="list-style-type: none"> <li>• "Stubby" 3/8" press fit with button magnet</li> <li>• Powerful rare earth magnet is easy to install with screw or adhesive</li> <li>• Standard gap: 1/2"</li> <li>• Pkg. quantity=5/bag</li> </ul>	<ul style="list-style-type: none"> <li>• Sentrol R-1125</li> <li>• GRI N-20RS-12</li> <li>• Tane STB-10DM</li> </ul>
 <p>955PST</p>		<p><b>955PST</b>  <b>3/4" Recessed Plunger Switch</b></p> <ul style="list-style-type: none"> <li>• Fast and easy to install</li> <li>• Perfect for internal doors... wide range of applications</li> <li>• Exclusive Staggered "T" terminals eliminate splice &amp; solder and are compatible with standard screwdriver</li> </ul> <p>• <b>Order 955PS for 18" leads</b></p>	<ul style="list-style-type: none"> <li>• Sentrol 3015</li> <li>• GRI PBF-100T</li> <li>• Tane PB-52T</li> </ul> <p><b>AVAILABLE IN AMMO BOX</b></p>
 <p>956RPT</p>		<p><b>956RPT</b>  <b>3/4" Recessed Roller Plunger Switch</b></p> <ul style="list-style-type: none"> <li>• Fast and easy to install</li> <li>• Perfect for internal doors... wide range of applications</li> <li>• Exclusive Staggered "T" terminals eliminate splice &amp; solder and are compatible with standard screwdriver</li> </ul> <p>• <b>Order 956RP for 18" leads</b></p>	<ul style="list-style-type: none"> <li>• Sentrol 3005,3008</li> <li>• GRI DS-01T</li> <li>• Tane RB-32</li> </ul> <p><b>AVAILABLE IN AMMO BOX</b></p>

**ALL MODELS:**

Specify color: White (WH), Brown (BR), Gray (GY)

## CONTACT

## DIMENSIONS


## SPECIAL FEATURES

## REPLACES

SURFACE MOUNT



7939



**7939**  
**Surface Mount Magnetic Contact**

- Standard gap: 1.0"
- Spacers, covers and screws included
- Cover conceals end of line resistor (EOL)
- Available in SPDT (7939-2) and wide gap (7939W)


• **PR-20439 WH or BR for PRO version**

- Sentrol 1085T,1285T
- GRI 29A
- Nascom N-85T
- Tane SM35
- Aleph DC2541

**AVAILABLE  
IN  
AMMO BOX**



7940

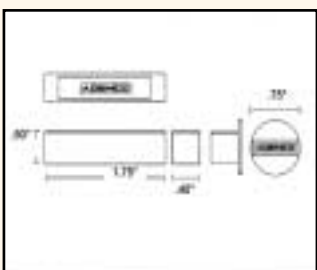


**7940**  
**Universal Surface/Recessed Mount**


- Screw mount, adhesive mount or recessed
- Wide gap: 2", recessed: 1"
- Unique quick wire connections – just insert wires and tighten – no stripping or soldering
- Recessed adaptors included

- Sentrol 1038T
- Amseco AMS51
- Tane- 50

**AVAILABLE  
IN  
AMMO BOX**

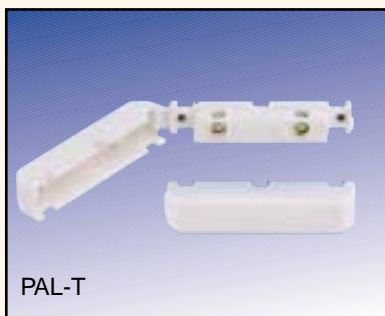

PAL-T

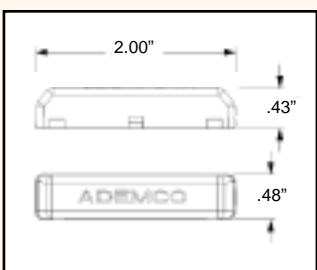


**PAL-T**  
**Surface Mount Magnetic Contact**

- Unique snap open case cover – no loose parts
- Concealed screw terminals eliminate splicing and soldering
- Super 1-1/8" gap makes installation a snap
- Screw mount or adhesive mount
- 6 wire entry points for mounting versatility


• **PAL-WH or BR for 5ft. leads**

- Sentrol 1038T
- GRI 100T,110T
- Tane- 60
- Aleph DC-2531

**AVAILABLE  
IN  
AMMO BOX**

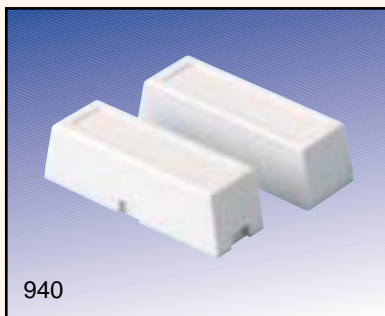

940

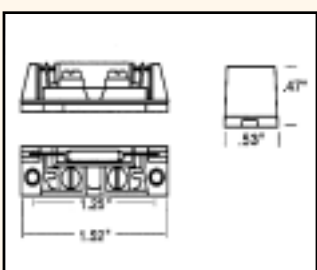


**940**  
**Surface Mount Magnetic Contact**


- Attractive cover keeps mounting screws, terminal screws, or EOL resistor hidden
- Standard gap: 3/4"
- Complete with spacers and mounting screws

- Sentrol 1085T
- GRI 29A, 129A
- Nascom N285T
- Aleph PS-1523

**AVAILABLE  
IN  
AMMO BOX**

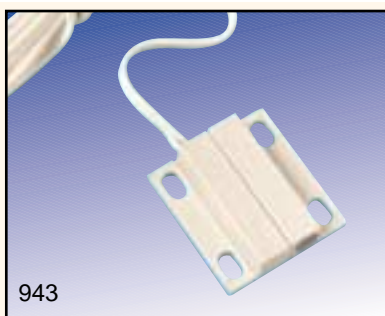

943

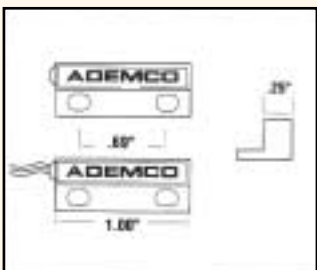

**943**  
**Mini Surface Mount with Leads**

- Self adhesive or screw mount
- Flange snaps off for even smaller adhesive mount switch
- 5' zip cord leads standard (943)
- Standard gap: 1/2"

- Sentrol 1145
- GRI 50F-12
- Nascom N25

**AVAILABLE  
IN  
AMMO BOX**

• **PR-20443 for PRO version (no logo and 18" leads)**

**ALL MODELS:**   
 Specify color: White (WH), Brown (BR), Gray (GY)