

CONTACT

DIMENSIONS


SPECIAL FEATURES

REPLACES

SURFACE MOUNT



945/949

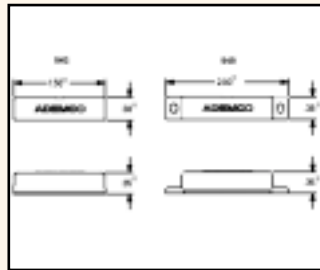


945/949 Surface Mount Magnetic Contact with Leads

- 15 foot zip cord leads standard
- Standard gap: 1-1/4"
- Choose self adhesive (945), or screw mount (949)
- Pkg. quantity=5/bag

- Sentrol 1035
- GRI 100-12,110-12
- Nascom N35
- Tane FM106
- Aleph PS1541



945T

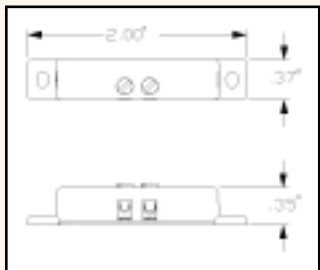

945T Mini Surface Mount with Screw Terminals


- Screw mount or adhesive mount
- Screw terminals eliminate wire splicing and soldering
- Standard gap: 1-1/8"

- Sentrol 1038T
- GRI 100T,110T
- Tane-60
- Aleph DC-2531

AVAILABLE
IN
AMMO BOX



PR-20445

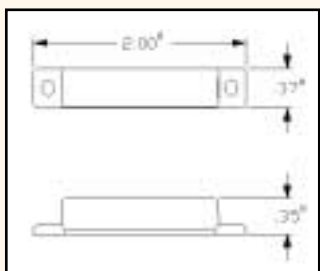


PR-20445 Mini Surface Mount with Leads

- Miniature size for cleaner look
- Standard gap: 1-1/4"
- 18" long wire leads
- Screw mount or adhesive mount


- Sentrol 1085,1032
- GRI 110-12
- Nascom N35
- Tane FM106
- Aleph PS1541

AVAILABLE
IN
AMMO BOX

COMMERCIAL

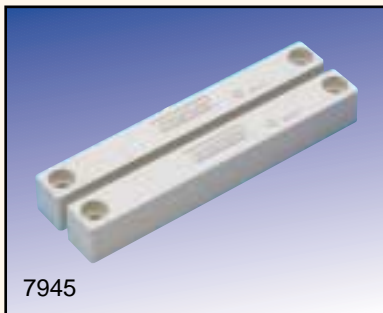


7945

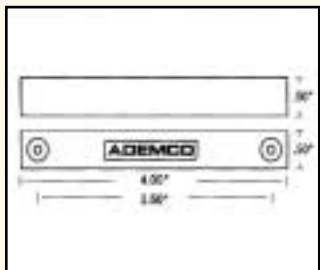


7945 XTP Surface Mount Magnetic Contact with Leads

- XTP contacts withstand surges up to 2400 volts DC
- 6' CLII cable is standard
- Epoxy sealed
- Wide gap of 2.5"
- Available in SPDT (7945-2GY)
- Pkg. quantity=1/bag

- Sentrol 1045
- GRI 400,410
- Amseco AMS37

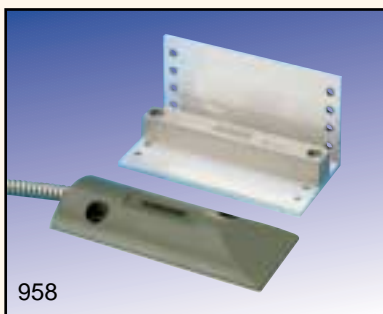

958

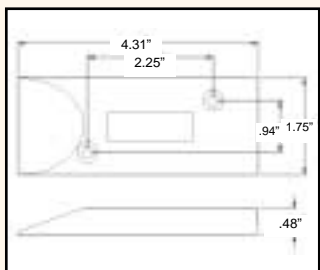

958 Overhead Door Magnetic Contact

- Adjustable magnet with L-bracket
- 24" armored cable is standard
- Standard gap: 2-3/8"
- Epoxy sealed for protection from moisture and impact
- Available in SPDT (958-2)
- Pkg. quantity=1/bag

- Amseco ODC59A
- Sentrol 2202AU,2202A
- GRI 4532/4532L

ALL MODELS:
Specify color: White (WH), Brown (BR), Gray (GY)

COMMERCIAL

RECESSED

AVAILABLE
IN
AMMO BOX





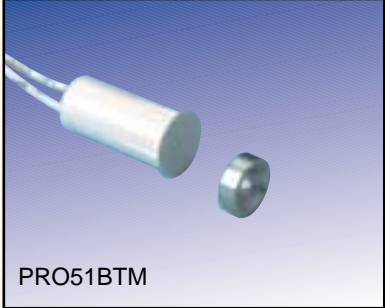

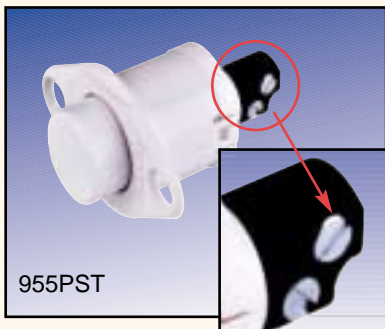

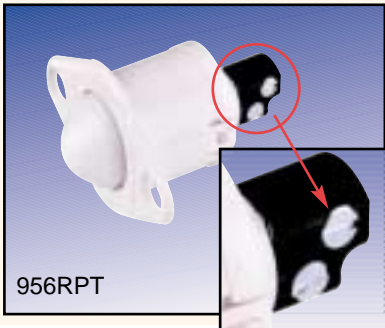

AVAILABLE
IN
AMMO BOX

AVAILABLE
IN
AMMO BOX

AVAILABLE
IN
AMMO BOX

ALL MODELS:   
Specify color: White (WH), Brown (BR), Gray (GY)

RECESSED

CONTACT	DIMENSIONS	SPECIAL FEATURES	REPLACES
 <p>951</p>		<p>951 3/8" Diameter Mini Recessed Contact</p> <ul style="list-style-type: none"> • With magnet only 1/2" long, the 951 is ideal for casement windows, sliding windows and other thin frame applications • Standard gap: 7/16" • 5' zip cord leads are standard <p>• PR-20451 for PRO version with 18" leads</p>	<ul style="list-style-type: none"> • Sentrol 1125 • GRI 20RS-12 • Nascom N-175N • Tane STB-10 • Aleph DC-1651 <p>AVAILABLE IN AMMO BOX</p>
 <p>PRO51SP</p>		<p>PRO51SP "Stubby" Press Fit Recessed Magnetic Contact with Wide Gap</p> <ul style="list-style-type: none"> • Stubby 3/8" diameter switch with extra length magnet • Standard gap: up to 3/4" • 18" Leads 	<ul style="list-style-type: none"> • GRI 5065 • Aleph PS-1650 <p>AVAILABLE IN AMMO BOX</p>
 <p>PRO51BTM</p>		<p>PRO51BTM 3/8" "Stubby" Recessed Contact with Rare Earth Button Magnet</p> <ul style="list-style-type: none"> • "Stubby" 3/8" press fit with button magnet • Powerful rare earth magnet is easy to install with screw or adhesive • Standard gap: 1/2" • Pkg. quantity=5/bag 	<ul style="list-style-type: none"> • Sentrol R-1125 • GRI N-20RS-12 • Tane STB-10DM
 <p>955PST</p>		<p>955PST 3/4" Recessed Plunger Switch</p> <ul style="list-style-type: none"> • Fast and easy to install • Perfect for internal doors... wide range of applications • Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screwdriver <p>• Order 955PS for 18" leads</p>	<ul style="list-style-type: none"> • Sentrol 3015 • GRI PBF-100T • Tane PB-52T <p>AVAILABLE IN AMMO BOX</p>
 <p>956RPT</p>		<p>956RPT 3/4" Recessed Roller Plunger Switch</p> <ul style="list-style-type: none"> • Fast and easy to install • Perfect for internal doors... wide range of applications • Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screwdriver <p>• Order 956RP for 18" leads</p>	<ul style="list-style-type: none"> • Sentrol 3005,3008 • GRI DS-01T • Tane RB-32 <p>AVAILABLE IN AMMO BOX</p>

CONTACT

DIMENSIONS


SPECIAL FEATURES

REPLACES

SURFACE MOUNT



7939

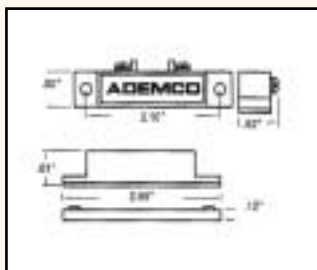

7939
Surface Mount Magnetic Contact

- Standard gap: 1.0"
- Spacers, covers and screws included
- Cover conceals end of line resistor (EOL)
- Available in SPDT (7939-2) and wide gap (7939W)


• **PR-20439 WH or BR for PRO version**

- Sentrol 1085T,1285T
- GRI 29A
- Nascom N-85T
- Tane SM35
- Aleph DC2541

AVAILABLE IN AMMO BOX



7940

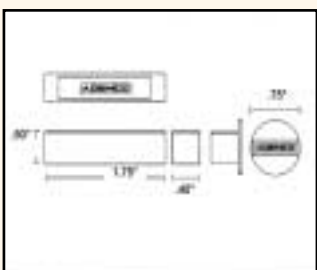


7940
Universal Surface/Recessed Mount


- Screw mount, adhesive mount or recessed
- Wide gap: 2", recessed: 1"
- Unique quick wire connections – just insert wires and tighten – no stripping or soldering
- Recessed adaptors included

- Sentrol 1038T
- Amseco AMS51
- Tane- 50

AVAILABLE IN AMMO BOX

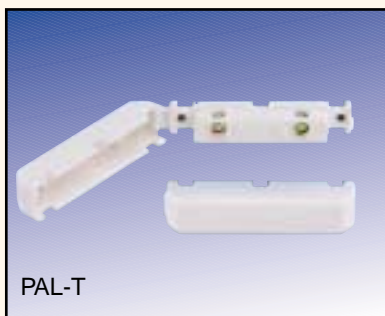

PAL-T

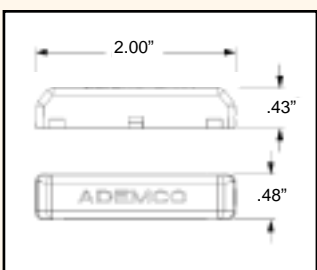


PAL-T
Surface Mount Magnetic Contact

- Unique snap open case cover – no loose parts
- Concealed screw terminals eliminate splicing and soldering
- Super 1-1/8" gap makes installation a snap
- Screw mount or adhesive mount
- 6 wire entry points for mounting versatility


• **PAL-WH or BR for 5ft. leads**

- Sentrol 1038T
- GRI 100T,110T
- Tane- 60
- Aleph DC-2531

AVAILABLE IN AMMO BOX

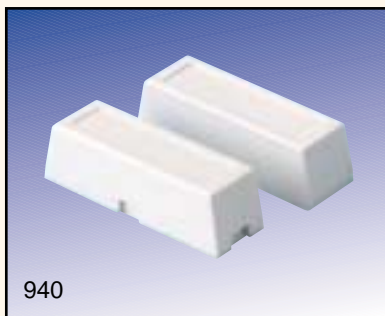

940

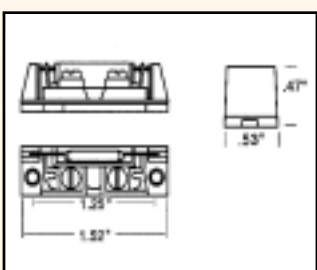


940
Surface Mount Magnetic Contact


- Attractive cover keeps mounting screws, terminal screws, or EOL resistor hidden
- Standard gap: 3/4"
- Complete with spacers and mounting screws

- Sentrol 1085T
- GRI 29A, 129A
- Nascom N285T
- Aleph PS-1523

AVAILABLE IN AMMO BOX

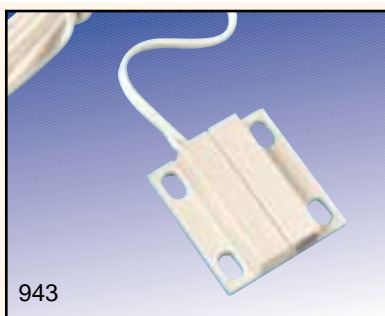

943

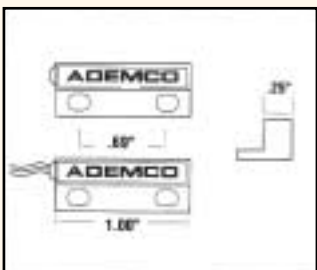

943
Mini Surface Mount with Leads

- Self adhesive or screw mount
- Flange snaps off for even smaller adhesive mount switch
- 5' zip cord leads standard (943)
- Standard gap: 1/2"

- Sentrol 1145
- GRI 50F-12
- Nascom N25

AVAILABLE IN AMMO BOX

• **PR-20443 for PRO version (no logo and 18" leads)**

ALL MODELS:
 Specify color: White (WH), Brown (BR), Gray (GY)